

PRODUCT INFORMATION




Its time-tested strength makes the Diamond Pro Stone Cut[®] Virtual Joint wall system the contractors' choice for large-scale projects. Composed of solid-face and virtual joint units with rough-hewn faces, this wall product provides an appealing multipiece look with the installation speed of a single-piece system.

The performance characteristics make it the proven solution for tall walls, Department of Transportation projects, commercial developments, water applications and other critical wall needs.

- Original rear-lip block
- Can be used to build gravity walls up to 4 feet high, including buried course, but excluding the cap*
- Taller walls can be built using geosynthetic reinforcement or the Anchorplex[™] system when designed by a qualified engineer
- Minimum inside radius, measured on the base course to the front of the units: 6 feet
- Minimum outside radius, measured on the top course to the front of the units: 4 feet

**This height assumes cores are filled with drainage aggregate, level backfill and clean, compacted sand or gravel and no surcharge.*

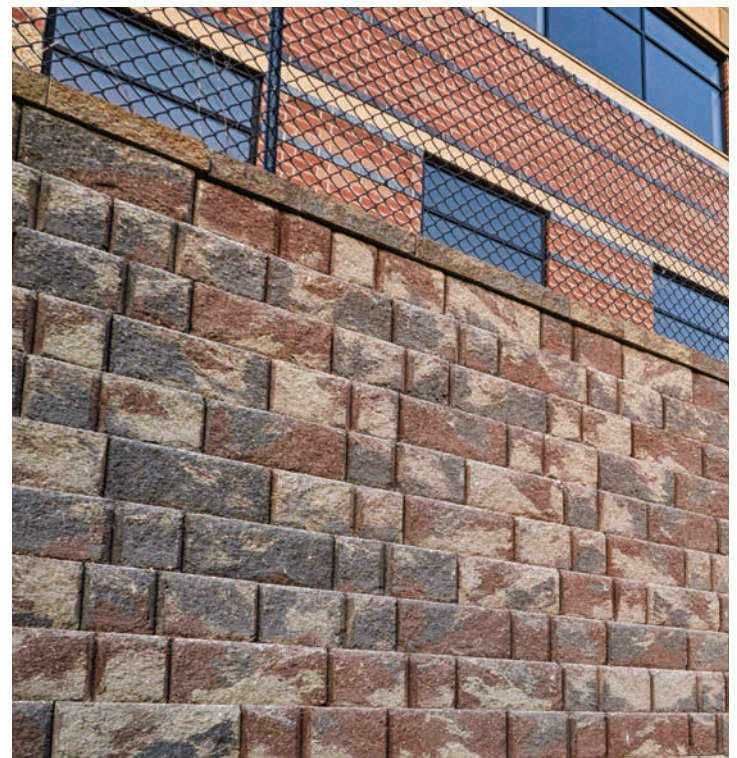

Diamond Pro Stone Cut[®]

VIRTUAL JOINT RETAINING WALL SYSTEM

PRODUCT INFORMATION

Installation Pattern:

1:1 ratio of virtual joint units to solid-face units



Units	Virtual Joint Left	Virtual Joint Right	Solid-face	Cap	Corner
Approximate Dimensions*	8" x 18" x 12"	8" x 18" x 12"	8" x 18" x 12"	Front, 4" x 17 ¹ / ₄ " x 10 ³ / ₈ " Back, 4" x 12" x 10 ³ / ₈ "	Front, 8" x 18" x 9" End, 8" x 18" x 9"
Approximate Weight*	77 lbs.	77 lbs.	77 lbs.	47 lbs.	101 lbs.
Coverage	1.0 sq. ft.	1.0 sq. ft.	1.0 sq. ft.	1.2 lin. ft.	1.5 sq. ft.
Setback/System Batter	1"/7.1°	1"/7.1°	1"/7.1°		

See anchorwall.com for installation instructions.

*Product dimensions are height by face length by depth. Actual dimensions and weights may vary from these approximate values due to variations in manufacturing processes. Specifications may change without notice. See your Anchor representative for additional information.

© 2015 Anchor Wall Systems, Inc. The logos, slogans, product names and other trademarks shown in this document are trademarks of Anchor Wall Systems, Inc. The wall system is made and sold under license from Anchor Wall Systems, Inc. (AWS). The wall system blocks are covered by the AWS Limited Warranty. For a complete copy, visit your local dealer or see anchorwall.com.

Anchor Wall Systems, Inc., 5959 Baker Road, Suite 390, Minnetonka, MN 55345.

73.3769.3 02/15 4015